
Instruction Manual & Warranty


Thank you for your purchase of this quality clock. The utmost care has gone into the design and manufacture of your clock. Please read these instructions and store them in a safe place for future reference.

FEATURES:

- LCD display with AM or PM indicator
 Indoor temperature and humidity display
- Countdown function
- Damp proof, fog proof and splash proof
- · Can hang, stand, stick to smooth wall tightly (glass or smooth tile, etc.)
- Requires 2 x AAA batteries (not supplied)

Usage scenario: bathroom, kitchen, examination room, beauty parlor, etc., home and daily use places.

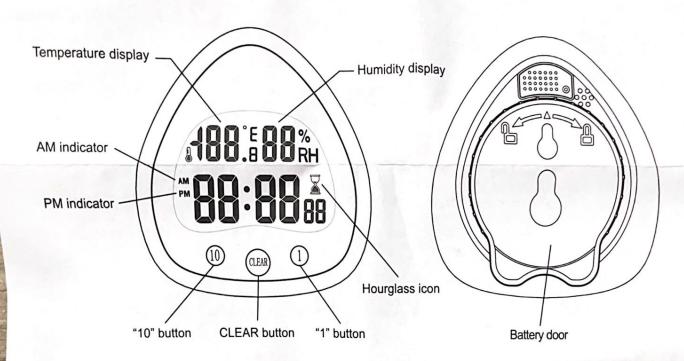



POWER SUPPLY

- This clock operates on 2 "AAA" batteries (not supplied). Remove the BATTERY door and insert 2 new "AAA" batteries in the direction of the polarity symbols. Please Make sure the batteries are new and inserted correctly.
- Do not mix old and new batteries.
- Do not mix alkaline, standard (carbon-zinc), or rechargeable (ni-cad, ni-mh, etc) batteries.

SETTING THE TIME

- Press and hold the TIME button approximately 2 seconds to activate Time setting, the LCD display flashes to set time.
- Press UP and DOWN button to the correct hour. The PM indicator light when the hour is advanced into the PM time. Press TIME button to confirm and move to next setting.
- Press UP and DOWN button to advance to the correct minute. Press TIME button to confirm and save previous settings. Display will now stop flashing.
- · When setting the time, be sure you are in the correct AM or PM time as indicated by the AM or PM indicator on the display. NOTE: In time mode, press TIME button to select 12 or 24 hour format. The default is 12-HOUR Format. If all of the settings do not require change wait 20 seconds after desired setting change has been made and the clock will

automatically save and exit setup.

USING THE FAHRENHEIT OR CELSIUS TEMPERATURE DISPLAY OPTION

Press the UP button to switch between the Celsius and Fahrenhelt temperature display.

NOTE: The default is Celslus setting. In the time setting state, switching between time and temperature should be done before the countdown function starts.

USING THE COUNT DOWN TIME

- · Press "10" button to set the countdown time, Add 10 minutes each time within 2 seconds, up to 99 minutes. Long press "10" button, take 10 minutes as unit, quickly add up the countdown time, up to 99 minutes.
- Press "1" button to set the countdown time, Add 1 minute each time within 2 seconds, up to 99 minutes. Long press "1" button, take 1 minute as unit, quickly add up the countdown time, up to 99 minutes.
- In the process of setting the countdown time, Press the CLEAR button to reset and exit the countdown setting.
- Set countdown, Without any key operation in 2 seconds, the countdown starts automatically.
- · When the countdown function is enabled, The hourglass icon is flashing.
- When the countdown function is enabled, Press the CLEAR button to turn off the countdown function at any time and cut back to the time display state.
- At the end of the countdown, Issue Bi Bi . . . sound alarm prompt, The duration of the sound is 1 minute, Press the CLEAR button to cancel the alarm at any time.

CARE OF YOUR CLOCK

· Replace the back up battery annually, or store the clock without a battery when not in use. A soft cloth or a paper towel may be used to clean your clock. Do not use any corrosive cleaner or chemical solutions on the clock. Keep the clock clean and dry to avoid any problems.

SUPPORT

· If you encounter any problems with this clock, please contact zeithaltershop@sina.com and we will deal with your issue within 24 hours.

> Model: ZH037 Printed in China